



BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Altrad-Belle.com

RPX 59

REVERSIBLE PLATE COMPACTORS

Heavy duty range of reversible plate compactors built to withstand the harshest site conditions. With improved baseplate design for excellent gradability & increased travel speeds and a higher compaction force for shorter usage times and deeper compaction.

Hourmeter as standard on Diesel E-Start & Petrol models and Extension Width options available for more versatility.

Available with Honda petrol, Hatz diesel or Hatz diesel electric engine options.



BUILDING A SUSTAINABLE FUTURE

RPX 59 RANGE

IF YOU'RE NOT MOVING FORWARDS
YOU'RE MOVING BACKWARDS

FEATURES & BENEFITS

- Robust design for long-life and use in the harshest site conditions.
- Petrol & Diesel models to suit all kind of applications.
- Electric start with key ignition & LED warning lamps, eliminates need for operator training associated with manual starting (Hatz models only)
- Control Handle & Additional Fixed Handle with strong locking:-
 - More positive handling & control.
 - Reduces shock loading on control handles.
- Angled baseplate for excellent gradability and travel speeds.
- Low HAV handle, safe for operators to use for long periods.
- High Compaction force for fast work and deep compaction.
- Handle mounted throttle, perfect for the operator.
- High performance battery (Hatz Electric Start only).
- Cyclone Air Filter as standard on Honda GX390 model.
- Hourmeter as standard on Petrol and Diesel Electric models.
- Specifically designed for hire and rental markets.
- Extension Plates available to give 650mm or 750mm width base plates.





**HANDLE MOUNTED THROTTLE,
PERFECT FOR THE OPERATOR**



**FIXED HANDLE TO AID
MANOUVERABILITY**



**HONDA GX390 (CYCLONE) PETROL
ENGINE MODEL AVAILABLE**



**ELECTRIC, KEY IGNITION START &
LED WARNING LAMPS
(DIESEL ELECTRIC MODEL)**



**HOURLMETER AS STANDARD ON
PETROL & DIESEL ELECTRIC MODELS**




**2 X 75MM OR 2 X 125MM BASEPLATE
EXTENSION PLATES AVAILABLE AS AN
OPTION**

TECHNICAL SPECIFICATIONS

RPX 59/65 RPX 59/75

All dimensions are in 'mm'

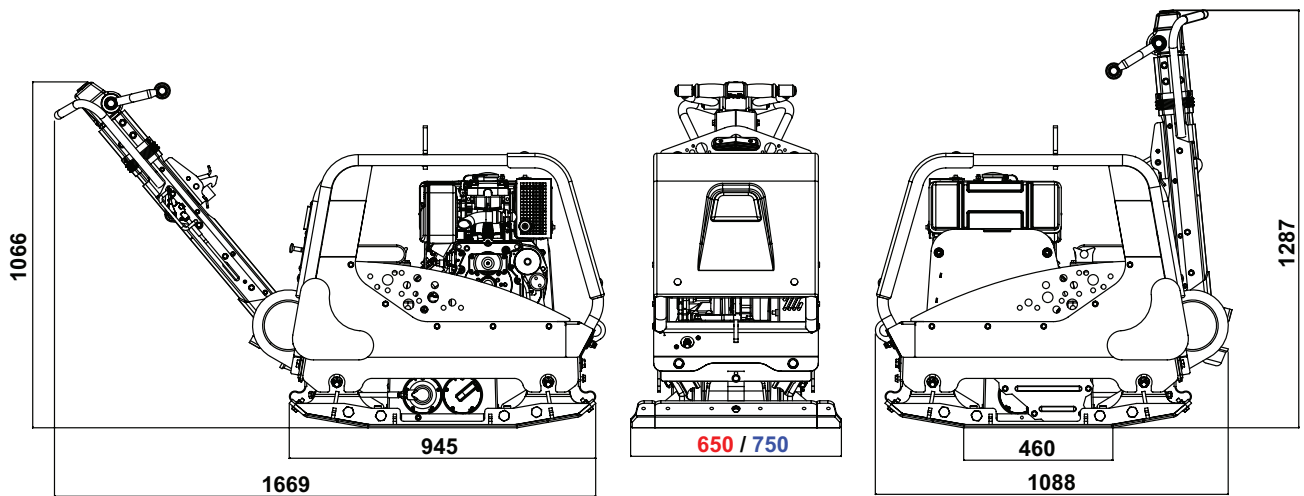

RPX 59/65

Part No.		161.9.214
Engine Power	(Hp / kW)	11.8 / 8.7
Engine RPM		3000
Plate Width	(mm)	650
Static Pressure	(kg/m ²)	1241
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	3.1
Weight	(kg)	360
Sound Power Level	(dB L _{WA})	108

Honda GX390 Petrol

Part No.		161.9.214
Engine Power	(Hp / kW)	11.8 / 8.7
Engine RPM		3000
Plate Width	(mm)	650
Static Pressure	(kg/m ²)	1241
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	3.1
Weight	(kg)	360
Sound Power Level	(dB L _{WA})	108

Hatz 1D50 Diesel

Part No.		161.9.212
Engine Power	(Hp / kW)	10.2 / 7.5
Engine RPM		3000
Plate Width	(mm)	650
Static Pressure	(kg/m ²)	1420
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	2.4
Weight	(kg)	412
Sound Power Level	(dB L _{WA})	108

Hatz 1D50 Diesel Electric Start

Part No.		161.9.213
Engine Power	(Hp / kW)	10.2 / 7.5
Engine RPM		3000
Plate Width	(mm)	650
Static Pressure	(kg/m ²)	1524
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	2.4
Weight	(kg)	442
Sound Power Level	(dB L _{WA})	108

RPX 59/75

Part No.		161.9.218
Engine Power	(Hp / kW)	11.8 / 8.7
Engine RPM		3000
Plate Width	(mm)	750
Static Pressure	(kg/m ²)	1102
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	3.1
Weight	(kg)	375
Sound Power Level	(dB L _{WA})	108

Honda GX390 Petrol

Part No.		161.9.218
Engine Power	(Hp / kW)	11.8 / 8.7
Engine RPM		3000
Plate Width	(mm)	750
Static Pressure	(kg/m ²)	1102
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	3.1
Weight	(kg)	375
Sound Power Level	(dB L _{WA})	108

Hatz 1D50 Diesel

Part No.		161.9.216
Engine Power	(Hp / kW)	10.2 / 7.5
Engine RPM		3000
Plate Width	(mm)	750
Static Pressure	(kg/m ²)	1256
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	2.4
Weight	(kg)	427
Sound Power Level	(dB L _{WA})	108

Hatz 1D50 Diesel Electric Start

Part No.		161.9.217
Engine Power	(Hp / kW)	10.2 / 7.5
Engine RPM		3000
Plate Width	(mm)	750
Static Pressure	(kg/m ²)	1344
Centrifugal Force	(kN)	59
Frequency	(Hz)	70
Max Gradient	(°)	20
Max. Travel Speed	(m/min)	28
Vibration Level	(m/sec ²)	2.4
Weight	(kg)	457
Sound Power Level	(dB L _{WA})	108

OPTIONS

75mm Extension Plates
125mm Extension Plates

OPP/106/DIO (Gives 650mm Base)
OPP/107/DIO (Gives 750mm Base)

